

QL - Quicklocks

Light Gauge Galvanized Piping System – Assembly



Specifications

Material: Galvanized steel

Surface: Electro galvanized

Seals available:

EPDM –UV light resistant – GREY color (Standard)


Nitrile – Oil resistant – BLACK color

Silicone – Heat resistant – RED color (-120 to +200 °C)

Description

For connecting galvanized piping with beaded ends.

Quicklocks are made from 1.2 mm galvanized steel.

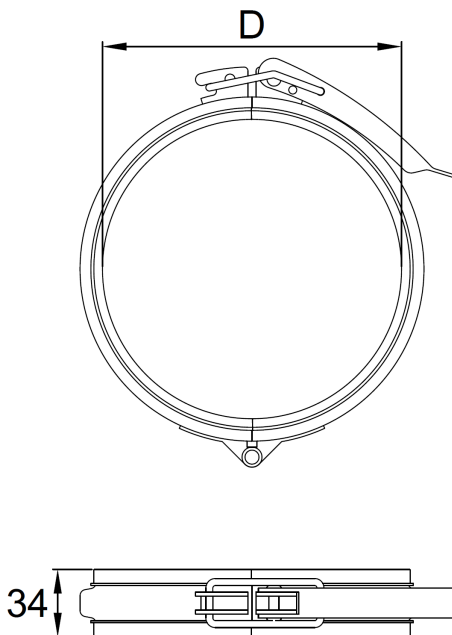

D (mm)	Part no.			Weight (kg)
	EPDM	Nitrile	Silicone	
80	01040080-E	01040080-N	01040080-S	0.2
100	01040100-E	01040100-N	01040100-S	0.2
120	01040120-E	01040120-N	01040120-S	0.2
125	01040125-E	01040125-N	01040125-S	0.2
140	01040140-E	01040140-N	01040140-S	0.3
150	01040150-E	01040150-N	01040150-S	0.3
160	01040160-E	01040160-N	01040160-S	0.3
180	01040180-E	01040180-N	01040180-S	0.3
200	01040200-E	01040200-N	01040200-S	0.3
225	01040225-E	01040225-N	01040225-S	0.4
250	01040250-E	01040250-N	01040250-S	0.4
275	01040275-E	01040275-N	01040275-S	0.4
300	01040300-E	01040300-N	01040300-S	0.5
315	01040315-E	01040315-N	01040315-S	0.5
350	01040350-E	01040350-N	01040350-S	0.5
400	01040400-E	01040400-N	01040400-S	0.6