

TR - Trouser pieces

Light gauge Galvanized piping system – Branches



Specifications


Material: Galvanized steel

Surface: Z275

Angle: 60° or 90° Degrees

Description

Beadings on ends of trouser pieces allows for assembly with fitting rings. Alternatively, loose flanges can be used for assembly.

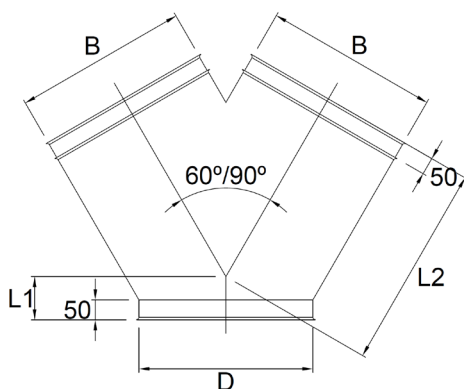

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
80	80	0.75	60	269	0.7	01360080-0080	01370080-0080
100	80	0.75	63	269	0.8	01360100-0080	01370100-0080
100	100	0.75	63	286	0.9	01360100-0100	01370100-0100
120	80	0.75	66	269	0.9	01360120-0080	01370120-0080
120	100	0.75	66	286	1.0	01360120-0100	01370120-0100
120	120	0.75	66	303	1.1	01360120-0120	01370120-0120
125	80	0.75	66	269	0.9	01360125-0080	01370125-0080
125	100	0.75	66	286	1.0	01360125-0100	01370125-0100
125	120	0.75	66	303	1.2	01360125-0120	01370125-0120
125	125	0.75	66	308	1.2	01360125-0125	01370125-0125
140	80	0.75	68	269	1.0	01360140-0080	01370140-0080
140	100	0.75	68	286	1.1	01360140-0100	01370140-0100
140	120	0.75	68	303	1.3	01360140-0120	01370140-0120
140	125	0.75	68	308	1.3	01360140-0125	01370140-0125
140	140	0.75	68	320	1.4	01360140-0140	01370140-0140
150	80	0.75	70	269	1.0	01360150-0080	01370150-0080
150	100	0.75	70	286	1.2	01360150-0100	01370150-0100
150	120	0.75	70	303	1.3	01360150-0120	01370150-0120
150	125	0.75	70	308	1.4	01360150-0125	01370150-0125
150	140	0.75	70	320	1.5	01360150-0140	01370150-0140
150	150	0.75	70	329	1.6	01360150-0150	01370150-0150
160	80	0.75	71	269	1.1	01360160-0080	01370160-0080
160	100	0.75	71	286	1.2	01360160-0100	01370160-0100
160	120	0.75	71	303	1.4	01360160-0120	01370160-0120

TR - Trouser pieces

Light gauge Galvanized piping system – Branches

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
160	125	0.75	71	308	1.4	01360160-0125	01370160-0125
160	140	0.75	71	320	1.5	01360160-0140	01370160-0140
160	150	0.75	71	329	1.6	01360160-0150	01370160-0150
160	160	0.75	71	338	1.7	01360160-0160	01370160-0160
180	80	0.75	73	269	1.2	01360180-0080	01370180-0080
180	100	0.75	73	286	1.3	01360180-0100	01370180-0100
180	120	0.75	73	303	1.5	01360180-0120	01370180-0120
180	125	0.75	73	308	1.5	01360180-0125	01370180-0125
180	140	0.75	73	320	1.7	01360180-0140	01370180-0140
180	150	0.75	73	329	1.7	01360180-0150	01370180-0150
180	160	0.75	73	338	1.8	01360180-0160	01370180-0160
180	180	0.75	73	355	2.0	01360180-0180	01370180-0180
200	80	0.75	76	269	1.3	01360200-0080	01370200-0080
200	100	0.75	76	286	1.5	01360200-0100	01370200-0100
200	120	0.75	76	303	1.6	01360200-0120	01370200-0120
200	125	0.75	76	308	1.7	01360200-0125	01370200-0125
200	140	0.75	76	320	1.8	01360200-0140	01370200-0140
200	150	0.75	76	329	1.9	01360200-0150	01370200-0150
200	160	0.75	76	338	2.0	01360200-0160	01370200-0160
200	180	0.75	76	355	2.1	01360200-0180	01370200-0180
200	200	0.75	76	372	2.3	01360200-0200	01370200-0200
225	80	0.75	79	269	1.5	01360225-0080	01370225-0080
225	100	0.75	79	286	1.6	01360225-0100	01370225-0100
225	120	0.75	79	303	1.8	01360225-0120	01370225-0120
225	125	0.75	79	308	1.8	01360225-0125	01370225-0125
225	140	0.75	79	320	1.9	01360225-0140	01370225-0140
225	150	0.75	79	329	2.0	01360225-0150	01370225-0150
225	160	0.75	79	338	2.1	01360225-0160	01370225-0160
225	180	0.75	79	355	2.3	01360225-0180	01370225-0180
225	200	0.75	79	372	2.5	01360225-0200	01370225-0200
225	225	0.75	79	394	2.8	01360225-0225	01370225-0225
250	80	0.75	83	269	1.6	01360250-0080	01370250-0080
250	100	0.75	83	286	1.8	01360250-0100	01370250-0100
250	120	0.75	83	303	1.9	01360250-0120	01370250-0120
250	125	0.75	83	308	2.0	01360250-0125	01370250-0125
250	140	0.75	83	320	2.1	01360250-0140	01370250-0140
250	150	0.75	83	329	2.2	01360250-0150	01370250-0150
250	160	0.75	83	338	2.3	01360250-0160	01370250-0160
250	180	0.75	83	355	2.5	01360250-0180	01370250-0180
250	200	0.75	83	372	2.7	01360250-0200	01370250-0200
250	225	0.75	83	394	3.0	01360250-0225	01370250-0225
250	250	0.75	83	415	3.3	01360250-0250	01370250-0250
275	80	0.75	86	269	1.8	01360275-0080	01370275-0080
275	100	0.75	86	286	1.9	01360275-0100	01370275-0100
275	120	0.75	86	303	2.1	01360275-0120	01370275-0120
275	125	0.75	86	308	2.1	01360275-0125	01370275-0125
275	140	0.75	86	320	2.3	01360275-0140	01370275-0140
275	150	0.75	86	329	2.4	01360275-0150	01370275-0150
275	160	0.75	86	338	2.5	01360275-0160	01370275-0160
275	180	0.75	86	355	2.7	01360275-0180	01370275-0180
275	200	0.75	86	372	2.9	01360275-0200	01370275-0200
275	225	0.75	86	394	3.2	01360275-0225	01370275-0225
275	250	0.75	86	415	3.4	01360275-0250	01370275-0250
275	275	0.75	86	437	3.8	01360275-0275	01370275-0275
300	80	0.75	89	269	1.9	01360300-0080	01370300-0080
300	100	0.75	89	286	2.1	01360300-0100	01370300-0100
300	120	0.75	89	303	2.3	01360300-0120	01370300-0120
300	125	0.75	89	308	2.3	01360300-0125	01370300-0125
300	140	0.75	89	320	2.4	01360300-0140	01370300-0140
300	150	0.75	89	329	2.5	01360300-0150	01370300-0150
300	160	0.75	89	338	2.6	01360300-0160	01370300-0160
300	180	0.75	89	355	2.8	01360300-0180	01370300-0180

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
300	200	0.75	89	372	3.1	01360300-0200	01370300-0200
300	225	0.75	89	394	3.4	01360300-0225	01370300-0225
300	250	0.75	89	415	3.7	01360300-0250	01370300-0250
300	275	0.75	89	437	4.0	01360300-0275	01370300-0275
300	300	0.75	89	458	4.3	01360300-0300	01370300-0300
315	80	0.75	91	269	2.0	01360315-0080	01370315-0080
315	100	0.75	91	286	2.2	01360315-0100	01370315-0100
315	120	0.75	91	303	2.4	01360315-0120	01370315-0120
315	125	0.75	91	308	2.4	01360315-0125	01370315-0125
315	140	0.75	91	320	2.5	01360315-0140	01370315-0140
315	150	0.75	91	329	2.6	01360315-0150	01370315-0150
315	160	0.75	91	338	2.7	01360315-0160	01370315-0160
315	180	0.75	91	355	3.0	01360315-0180	01370315-0180
315	200	0.75	91	372	3.2	01360315-0200	01370315-0200
315	225	0.75	91	394	3.5	01360315-0225	01370315-0225
315	250	0.75	91	415	3.8	01360315-0250	01370315-0250
315	275	0.75	91	437	4.1	01360315-0275	01370315-0275
315	300	0.75	91	458	4.4	01360315-0300	01370315-0300
315	315	0.75	91	471	4.6	01360315-0315	01370315-0315
350	80	0.75	96	269	2.2	01360350-0080	01370350-0080
350	100	0.75	96	286	2.4	01360350-0100	01370350-0100
350	120	0.75	96	303	2.6	01360350-0120	01370350-0120
350	125	0.75	96	308	2.6	01360350-0125	01370350-0125
350	140	0.75	96	320	2.8	01360350-0140	01370350-0140
350	150	0.75	96	329	2.9	01360350-0150	01370350-0150
350	160	0.75	96	338	3.0	01360350-0160	01370350-0160
350	180	0.75	96	355	3.2	01360350-0180	01370350-0180
350	200	0.75	96	372	3.4	01360350-0200	01370350-0200
350	225	0.75	96	394	3.7	01360350-0225	01370350-0225
350	250	0.75	96	415	4.1	01360350-0250	01370350-0250
350	275	0.75	96	437	4.4	01360350-0275	01370350-0275
350	300	0.75	96	458	4.7	01360350-0300	01370350-0300
350	315	0.75	96	471	5.0	01360350-0315	01370350-0315
350	350	0.75	96	501	5.5	01360350-0350	01370350-0350
400	80	0.90	102	269	3.0	01360400-0080	01370400-0080
400	100	0.90	102	286	3.3	01360400-0100	01370400-0100
400	120	0.90	102	303	3.5	01360400-0120	01370400-0120
400	125	0.90	102	308	3.6	01360400-0125	01370400-0125
400	140	0.90	102	320	3.8	01360400-0140	01370400-0140
400	150	0.90	102	329	3.9	01360400-0150	01370400-0150
400	160	0.90	102	338	4.0	01360400-0160	01370400-0160
400	180	0.90	102	355	4.3	01360400-0180	01370400-0180
400	200	0.90	102	372	4.6	01360400-0200	01370400-0200
400	225	0.90	102	394	5.0	01360400-0225	01370400-0225
400	250	0.90	102	415	5.4	01360400-0250	01370400-0250
400	275	0.90	102	437	5.8	01360400-0275	01370400-0275
400	300	0.90	102	458	6.2	01360400-0300	01370400-0300
400	315	0.90	102	471	6.5	01360400-0315	01370400-0315
400	350	0.90	102	501	7.1	01360400-0350	01370400-0350
400	400	0.90	102	544	8.1	01360400-0400	01370400-0400
450	80	0.90	109	269	3.4	01360450-0080	01370450-0080
450	100	0.90	109	286	3.7	01360450-0100	01370450-0100
450	120	0.90	109	303	3.9	01360450-0120	01370450-0120
450	125	0.90	109	308	4.0	01360450-0125	01370450-0125
450	140	0.90	109	320	4.2	01360450-0140	01370450-0140
450	150	0.90	109	329	4.4	01360450-0150	01370450-0150
450	160	0.90	109	338	4.5	01360450-0160	01370450-0160
450	180	0.90	109	355	4.8	01360450-0180	01370450-0180
450	200	0.90	109	372	5.1	01360450-0200	01370450-0200
450	225	0.90	109	394	5.5	01360450-0225	01370450-0225
450	250	0.90	109	415	5.9	01360450-0250	01370450-0250
450	275	0.90	109	437	6.3	01360450-0275	01370450-0275

TR - Trouser pieces

Light gauge Galvanized piping system – Branches

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
450	300	0.90	109	458	6.8	01360450-0300	01370450-0300
450	315	0.90	109	471	7.1	01360450-0315	01370450-0315
450	350	0.90	109	501	7.7	01360450-0350	01370450-0350
450	400	0.90	109	544	8.8	01360450-0400	01370450-0400
450	450	0.90	109	587	9.9	01360450-0450	01370450-0450
500	80	0.90	115	269	3.9	01360500-0080	01370500-0080
500	100	0.90	115	286	4.1	01360500-0100	01370500-0100
500	120	0.90	115	303	4.4	01360500-0120	01370500-0120
500	125	0.90	115	308	4.5	01360500-0125	01370500-0125
500	140	0.90	115	320	4.7	01360500-0140	01370500-0140
500	150	0.90	115	329	4.8	01360500-0150	01370500-0150
500	160	0.90	115	338	5.0	01360500-0160	01370500-0160
500	180	0.90	115	355	5.3	01360500-0180	01370500-0180
500	200	0.90	115	372	5.6	01360500-0200	01370500-0200
500	225	0.90	115	394	6.0	01360500-0225	01370500-0225
500	250	0.90	115	415	6.4	01360500-0250	01370500-0250
500	275	0.90	115	437	6.9	01360500-0275	01370500-0275
500	300	0.90	115	458	7.4	01360500-0300	01370500-0300
500	315	0.90	115	471	7.6	01360500-0315	01370500-0315
500	350	0.90	115	501	8.3	01360500-0350	01370500-0350
500	400	0.90	115	544	9.4	01360500-0400	01370500-0400
500	450	0.90	115	587	10.5	01360500-0450	01370500-0450
500	500	0.90	115	630	11.7	01360500-0500	01370500-0500
550	80	0.90	122	269	4.3	01360550-0080	01370550-0080
550	100	0.90	122	286	4.6	01360550-0100	01370550-0100
550	120	0.90	122	303	4.9	01360550-0120	01370550-0120
550	125	0.90	122	308	4.9	01360550-0125	01370550-0125
550	140	0.90	122	320	5.2	01360550-0140	01370550-0140
550	150	0.90	122	329	5.3	01360550-0150	01370550-0150
550	160	0.90	122	338	5.5	01360550-0160	01370550-0160
550	180	0.90	122	355	5.8	01360550-0180	01370550-0180
550	200	0.90	122	372	6.1	01360550-0200	01370550-0200
550	225	0.90	122	394	6.5	01360550-0225	01370550-0225
550	250	0.90	122	415	7.0	01360550-0250	01370550-0250
550	275	0.90	122	437	7.5	01360550-0275	01370550-0275
550	300	0.90	122	458	7.9	01360550-0300	01370550-0300
550	315	0.90	122	471	8.2	01360550-0315	01370550-0315
550	350	0.90	122	501	9.0	01360550-0350	01370550-0350
550	400	0.90	122	544	10.1	01360550-0400	01370550-0400
550	450	0.90	122	587	11.2	01360550-0450	01370550-0450
550	500	0.90	122	630	12.5	01360550-0500	01370550-0500
550	550	0.90	122	673	13.8	01360550-0550	01370550-0550
600	80	0.90	128	269	4.7	01360600-0080	01370600-0080
600	100	0.90	128	286	5.0	01360600-0100	01370600-0100
600	120	0.90	128	303	5.3	01360600-0120	01370600-0120
600	125	0.90	128	308	5.4	01360600-0125	01370600-0125
600	140	0.90	128	320	5.6	01360600-0140	01370600-0140
600	150	0.90	128	329	5.8	01360600-0150	01370600-0150
600	160	0.90	128	338	6.0	01360600-0160	01370600-0160
600	180	0.90	128	355	6.3	01360600-0180	01370600-0180
600	200	0.90	128	372	6.6	01360600-0200	01370600-0200
600	225	0.90	128	394	7.1	01360600-0225	01370600-0225
600	250	0.90	128	415	7.6	01360600-0250	01370600-0250
600	275	0.90	128	437	8.0	01360600-0275	01370600-0275
600	300	0.90	128	458	8.6	01360600-0300	01370600-0300
600	315	0.90	128	471	8.9	01360600-0315	01370600-0315
600	350	0.90	128	501	9.6	01360600-0350	01370600-0350
600	400	0.90	128	544	10.7	01360600-0400	01370600-0400
600	450	0.90	128	587	11.9	01360600-0450	01370600-0450
600	500	0.90	128	630	13.2	01360600-0500	01370600-0500
600	550	0.90	128	673	14.6	01360600-0550	01370600-0550
600	600	0.90	128	716	16.0	01360600-0600	01370600-0600

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
630	80	0.90	132	269	5.0	01360630-0080	01370630-0080
630	100	0.90	132	286	5.3	01360630-0100	01370630-0100
630	120	0.90	132	303	5.6	01360630-0120	01370630-0120
630	125	0.90	132	308	5.7	01360630-0125	01370630-0125
630	140	0.90	132	320	5.9	01360630-0140	01370630-0140
630	150	0.90	132	329	6.1	01360630-0150	01370630-0150
630	160	0.90	132	338	6.3	01360630-0160	01370630-0160
630	180	0.90	132	355	6.6	01360630-0180	01370630-0180
630	200	0.90	132	372	7.0	01360630-0200	01370630-0200
630	225	0.90	132	394	7.4	01360630-0225	01370630-0225
630	250	0.90	132	415	7.9	01360630-0250	01370630-0250
630	275	0.90	132	437	8.4	01360630-0275	01370630-0275
630	300	0.90	132	458	8.9	01360630-0300	01370630-0300
630	315	0.90	132	471	9.2	01360630-0315	01370630-0315
630	350	0.90	132	501	10.0	01360630-0350	01370630-0350
630	400	0.90	132	544	11.2	01360630-0400	01370630-0400
630	450	0.90	132	587	12.4	01360630-0450	01370630-0450
630	500	0.90	132	630	13.7	01360630-0500	01370630-0500
630	550	0.90	132	673	15.0	01360630-0550	01370630-0550
630	600	0.90	132	716	16.5	01360630-0600	01370630-0600
630	630	0.90	132	742	17.4	01360630-0630	01370630-0630
650	80	0.90	135	269	5.2	01360650-0080	01370650-0080
650	100	0.90	135	286	5.5	01360650-0100	01370650-0100
650	120	0.90	135	303	5.8	01360650-0120	01370650-0120
650	125	0.90	135	308	5.9	01360650-0125	01370650-0125
650	140	0.90	135	320	6.1	01360650-0140	01370650-0140
650	150	0.90	135	329	6.3	01360650-0150	01370650-0150
650	160	0.90	135	338	6.5	01360650-0160	01370650-0160
650	180	0.90	135	355	6.8	01360650-0180	01370650-0180
650	200	0.90	135	372	7.2	01360650-0200	01370650-0200
650	225	0.90	135	394	7.7	01360650-0225	01370650-0225
650	250	0.90	135	415	8.1	01360650-0250	01370650-0250
650	275	0.90	135	437	8.6	01360650-0275	01370650-0275
650	300	0.90	135	458	9.2	01360650-0300	01370650-0300
650	315	0.90	135	471	9.5	01360650-0315	01370650-0315
650	350	0.90	135	501	10.3	01360650-0350	01370650-0350
650	400	0.90	135	544	11.4	01360650-0400	01370650-0400
650	450	0.90	135	587	12.7	01360650-0450	01370650-0450
650	500	0.90	135	630	14.0	01360650-0500	01370650-0500
650	550	0.90	135	673	15.4	01360650-0550	01370650-0550
650	600	0.90	135	716	16.8	01360650-0600	01370650-0600
650	630	0.90	135	742	17.7	01360650-0630	01370650-0630
650	650	0.90	135	759	18.3	01360650-0650	01370650-0650
700	80	0.90	141	269	5.7	01360700-0080	01370700-0080
700	100	0.90	141	286	6.0	01360700-0100	01370700-0100
700	120	0.90	141	303	6.3	01360700-0120	01370700-0120
700	125	0.90	141	308	6.4	01360700-0125	01370700-0125
700	140	0.90	141	320	6.7	01360700-0140	01370700-0140
700	150	0.90	141	329	6.8	01360700-0150	01370700-0150
700	160	0.90	141	338	7.0	01360700-0160	01370700-0160
700	180	0.90	141	355	7.4	01360700-0180	01370700-0180
700	200	0.90	141	372	7.7	01360700-0200	01370700-0200
700	225	0.90	141	394	8.2	01360700-0225	01370700-0225
700	250	0.90	141	415	8.7	01360700-0250	01370700-0250
700	275	0.90	141	437	9.3	01360700-0275	01370700-0275
700	300	0.90	141	458	9.8	01360700-0300	01370700-0300
700	315	0.90	141	471	10.1	01360700-0315	01370700-0315
700	350	0.90	141	501	10.9	01360700-0350	01370700-0350
700	400	0.90	141	544	12.1	01360700-0400	01370700-0400
700	450	0.90	141	587	13.4	01360700-0450	01370700-0450
700	500	0.90	141	630	14.8	01360700-0500	01370700-0500
700	550	0.90	141	673	16.2	01360700-0550	01370700-0550

TR - Trouser pieces

Light gauge Galvanized piping system – Branches

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
700	600	0.90	141	716	17.7	01360700-0600	01370700-0600
700	630	0.90	141	742	18.6	01360700-0630	01370700-0630
700	650	0.90	141	759	19.2	01360700-0650	01370700-0650
700	700	0.90	141	802	20.9	01360700-0700	01370700-0700
750	80	0.90	148	269	6.2	01360750-0080	01370750-0080
750	100	0.90	148	286	6.5	01360750-0100	01370750-0100
750	120	0.90	148	303	6.8	01360750-0120	01370750-0120
750	125	0.90	148	308	6.9	01360750-0125	01370750-0125
750	140	0.90	148	320	7.2	01360750-0140	01370750-0140
750	150	0.90	148	329	7.4	01360750-0150	01370750-0150
750	160	0.90	148	338	7.6	01360750-0160	01370750-0160
750	180	0.90	148	355	7.9	01360750-0180	01370750-0180
750	200	0.90	148	372	8.3	01360750-0200	01370750-0200
750	225	0.90	148	394	8.8	01360750-0225	01370750-0225
750	250	0.90	148	415	9.3	01360750-0250	01370750-0250
750	275	0.90	148	437	9.9	01360750-0275	01370750-0275
750	300	0.90	148	458	10.4	01360750-0300	01370750-0300
750	315	0.90	148	471	10.8	01360750-0315	01370750-0315
750	350	0.90	148	501	11.6	01360750-0350	01370750-0350
750	400	0.90	148	544	12.9	01360750-0400	01370750-0400
750	450	0.90	148	587	14.2	01360750-0450	01370750-0450
750	500	0.90	148	630	15.5	01360750-0500	01370750-0500
750	550	0.90	148	673	17.0	01360750-0550	01370750-0550
750	600	0.90	148	716	18.5	01360750-0600	01370750-0600
750	630	0.90	148	742	19.5	01360750-0630	01370750-0630
750	650	0.90	148	759	20.1	01360750-0650	01370750-0650
750	700	0.90	148	802	21.8	01360750-0700	01370750-0700
750	750	0.90	148	845	23.5	01360750-0750	01370750-0750
800	80	0.90	154	269	6.7	01360800-0080	01370800-0080
800	100	0.90	154	286	7.0	01360800-0100	01370800-0100
800	120	0.90	154	303	7.4	01360800-0120	01370800-0120
800	125	0.90	154	308	7.5	01360800-0125	01370800-0125
800	140	0.90	154	320	7.7	01360800-0140	01370800-0140
800	150	0.90	154	329	7.9	01360800-0150	01370800-0150
800	160	0.90	154	338	8.1	01360800-0160	01370800-0160
800	180	0.90	154	355	8.5	01360800-0180	01370800-0180
800	200	0.90	154	372	8.9	01360800-0200	01370800-0200
800	225	0.90	154	394	9.4	01360800-0225	01370800-0225
800	250	0.90	154	415	10.0	01360800-0250	01370800-0250
800	275	0.90	154	437	10.5	01360800-0275	01370800-0275
800	300	0.90	154	458	11.1	01360800-0300	01370800-0300
800	315	0.90	154	471	11.5	01360800-0315	01370800-0315
800	350	0.90	154	501	12.3	01360800-0350	01370800-0350
800	400	0.90	154	544	13.6	01360800-0400	01370800-0400
800	450	0.90	154	587	14.9	01360800-0450	01370800-0450
800	500	0.90	154	630	16.3	01360800-0500	01370800-0500
800	550	0.90	154	673	17.8	01360800-0550	01370800-0550
800	600	0.90	154	716	19.4	01360800-0600	01370800-0600
800	630	0.90	154	742	20.4	01360800-0630	01370800-0630
800	650	0.90	154	759	21.0	01360800-0650	01370800-0650
800	700	0.90	154	802	22.7	01360800-0700	01370800-0700
800	750	0.90	154	845	24.5	01360800-0750	01370800-0750
800	800	0.90	154	888	26.4	01360800-0800	01370800-0800
850	80	0.90	161	269	7.2	01360850-0080	01370850-0080
850	100	0.90	161	286	7.5	01360850-0100	01370850-0100
850	120	0.90	161	303	7.9	01360850-0120	01370850-0120
850	125	0.90	161	308	8.0	01360850-0125	01370850-0125
850	140	0.90	161	320	8.3	01360850-0140	01370850-0140
850	150	0.90	161	329	8.5	01360850-0150	01370850-0150
850	160	0.90	161	338	8.7	01360850-0160	01370850-0160
850	180	0.90	161	355	9.1	01360850-0180	01370850-0180
850	200	0.90	161	372	9.5	01360850-0200	01370850-0200

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
850	225	0.90	161	394	10.1	01360850-0225	01370850-0225
850	250	0.90	161	415	10.6	01360850-0250	01370850-0250
850	275	0.90	161	437	11.2	01360850-0275	01370850-0275
850	300	0.90	161	458	11.8	01360850-0300	01370850-0300
850	315	0.90	161	471	12.1	01360850-0315	01370850-0315
850	350	0.90	161	501	13.0	01360850-0350	01370850-0350
850	400	0.90	161	544	14.3	01360850-0400	01370850-0400
850	450	0.90	161	587	15.7	01360850-0450	01370850-0450
850	500	0.90	161	630	17.2	01360850-0500	01370850-0500
850	550	0.90	161	673	18.7	01360850-0550	01370850-0550
850	600	0.90	161	716	20.3	01360850-0600	01370850-0600
850	630	0.90	161	742	21.3	01360850-0630	01370850-0630
850	650	0.90	161	759	22.0	01360850-0650	01370850-0650
850	700	0.90	161	802	23.7	01360850-0700	01370850-0700
850	750	0.90	161	845	25.5	01360850-0750	01370850-0750
850	800	0.90	161	888	27.4	01360850-0800	01370850-0800
850	850	0.90	161	931	29.3	01360850-0850	01370850-0850
900	80	0.90	167	269	7.7	01360900-0080	01370900-0080
900	100	0.90	167	286	8.1	01360900-0100	01370900-0100
900	120	0.90	167	303	8.5	01360900-0120	01370900-0120
900	125	0.90	167	308	8.6	01360900-0125	01370900-0125
900	140	0.90	167	320	8.9	01360900-0140	01370900-0140
900	150	0.90	167	329	9.1	01360900-0150	01370900-0150
900	160	0.90	167	338	9.3	01360900-0160	01370900-0160
900	180	0.90	167	355	9.7	01360900-0180	01370900-0180
900	200	0.90	167	372	10.1	01360900-0200	01370900-0200
900	225	0.90	167	394	10.7	01360900-0225	01370900-0225
900	250	0.90	167	415	11.3	01360900-0250	01370900-0250
900	275	0.90	167	437	11.9	01360900-0275	01370900-0275
900	300	0.90	167	458	12.5	01360900-0300	01370900-0300
900	315	0.90	167	471	12.8	01360900-0315	01370900-0315
900	350	0.90	167	501	13.7	01360900-0350	01370900-0350
900	400	0.90	167	544	15.1	01360900-0400	01370900-0400
900	450	0.90	167	587	16.5	01360900-0450	01370900-0450
900	500	0.90	167	630	18.0	01360900-0500	01370900-0500
900	550	0.90	167	673	19.6	01360900-0550	01370900-0550
900	600	0.90	167	716	21.2	01360900-0600	01370900-0600
900	630	0.90	167	742	22.2	01360900-0630	01370900-0630
900	650	0.90	167	759	22.9	01360900-0650	01370900-0650
900	700	0.90	167	802	24.7	01360900-0700	01370900-0700
900	750	0.90	167	845	26.5	01360900-0750	01370900-0750
900	800	0.90	167	888	28.4	01360900-0800	01370900-0800
900	850	0.90	167	931	30.4	01360900-0850	01370900-0850
900	900	0.90	167	974	32.5	01360900-0900	01370900-0900
950	80	0.90	174	269	8.3	01360950-0080	01370950-0080
950	100	0.90	174	286	8.6	01360950-0100	01370950-0100
950	120	0.90	174	303	9.0	01360950-0120	01370950-0120
950	125	0.90	174	308	9.1	01360950-0125	01370950-0125
950	140	0.90	174	320	9.5	01360950-0140	01370950-0140
950	150	0.90	174	329	9.7	01360950-0150	01370950-0150
950	160	0.90	174	338	9.9	01360950-0160	01370950-0160
950	180	0.90	174	355	10.3	01360950-0180	01370950-0180
950	200	0.90	174	372	10.8	01360950-0200	01370950-0200
950	225	0.90	174	394	11.3	01360950-0225	01370950-0225
950	250	0.90	174	415	11.9	01360950-0250	01370950-0250
950	275	0.90	174	437	12.5	01360950-0275	01370950-0275
950	300	0.90	174	458	13.2	01360950-0300	01370950-0300
950	315	0.90	174	471	13.6	01360950-0315	01370950-0315
950	350	0.90	174	501	14.5	01360950-0350	01370950-0350
950	400	0.90	174	544	15.9	01360950-0400	01370950-0400
950	450	0.90	174	587	17.3	01360950-0450	01370950-0450
950	500	0.90	174	630	18.8	01360950-0500	01370950-0500

TR - Trouser pieces

Light gauge Galvanized piping system – Branches

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
950	550	0.90	174	673	20.4	01360950-0550	01370950-0550
950	600	0.90	174	716	22.1	01360950-0600	01370950-0600
950	630	0.90	174	742	23.1	01360950-0630	01370950-0630
950	650	0.90	174	759	23.8	01360950-0650	01370950-0650
950	700	0.90	174	802	25.7	01360950-0700	01370950-0700
950	750	0.90	174	845	27.5	01360950-0750	01370950-0750
950	800	0.90	174	888	29.5	01360950-0800	01370950-0800
950	850	0.90	174	931	31.5	01360950-0850	01370950-0850
950	900	0.90	174	974	33.6	01360950-0900	01370950-0900
950	950	0.90	174	1017	35.8	01360950-0950	01370950-0950
1000	80	0.90	180	269	8.8	01361000-0080	01371000-0080
1000	100	0.90	180	286	9.2	01361000-0100	01371000-0100
1000	120	0.90	180	303	9.6	01361000-0120	01371000-0120
1000	125	0.90	180	308	9.7	01361000-0125	01371000-0125
1000	140	0.90	180	320	10.1	01361000-0140	01371000-0140
1000	150	0.90	180	329	10.3	01361000-0150	01371000-0150
1000	160	0.90	180	338	10.5	01361000-0160	01371000-0160
1000	180	0.90	180	355	11.0	01361000-0180	01371000-0180
1000	200	0.90	180	372	11.4	01361000-0200	01371000-0200
1000	225	0.90	180	394	12.0	01361000-0225	01371000-0225
1000	250	0.90	180	415	12.6	01361000-0250	01371000-0250
1000	275	0.90	180	437	13.2	01361000-0275	01371000-0275
1000	300	0.90	180	458	13.9	01361000-0300	01371000-0300
1000	315	0.90	180	471	14.3	01361000-0315	01371000-0315
1000	350	0.90	180	501	15.2	01361000-0350	01371000-0350
1000	400	0.90	180	544	16.7	01361000-0400	01371000-0400
1000	450	0.90	180	587	18.1	01361000-0450	01371000-0450
1000	500	0.90	180	630	19.7	01361000-0500	01371000-0500
1000	550	0.90	180	673	21.3	01361000-0550	01371000-0550
1000	600	0.90	180	716	23.0	01361000-0600	01371000-0600
1000	630	0.90	180	742	24.1	01361000-0630	01371000-0630
1000	650	0.90	180	759	24.8	01361000-0650	01371000-0650
1000	700	0.90	180	802	26.7	01361000-0700	01371000-0700
1000	750	0.90	180	845	28.6	01361000-0750	01371000-0750
1000	800	0.90	180	888	30.6	01361000-0800	01371000-0800
1000	850	0.90	180	931	32.6	01361000-0850	01371000-0850
1000	900	0.90	180	974	34.8	01361000-0900	01371000-0900
1000	950	0.90	180	1017	37.0	01361000-0950	01371000-0950
1000	1000	0.90	180	1060	39.3	01361000-1000	01371000-1000
1050	80	0.90	187	269	9.4	01361050-0080	01371050-0080
1050	100	0.90	187	286	9.8	01361050-0100	01371050-0100
1050	120	0.90	187	303	10.2	01361050-0120	01371050-0120
1050	125	0.90	187	308	10.3	01361050-0125	01371050-0125
1050	140	0.90	187	320	10.7	01361050-0140	01371050-0140
1050	150	0.90	187	329	10.9	01361050-0150	01371050-0150
1050	160	0.90	187	338	11.1	01361050-0160	01371050-0160
1050	180	0.90	187	355	11.6	01361050-0180	01371050-0180
1050	200	0.90	187	372	12.1	01361050-0200	01371050-0200
1050	225	0.90	187	394	12.7	01361050-0225	01371050-0225
1050	250	0.90	187	415	13.3	01361050-0250	01371050-0250
1050	275	0.90	187	437	14.0	01361050-0275	01371050-0275
1050	300	0.90	187	458	14.6	01361050-0300	01371050-0300
1050	315	0.90	187	471	15.0	01361050-0315	01371050-0315
1050	350	0.90	187	501	16.0	01361050-0350	01371050-0350
1050	400	0.90	187	544	17.5	01361050-0400	01371050-0400
1050	450	0.90	187	587	19.0	01361050-0450	01371050-0450
1050	500	0.90	187	630	20.6	01361050-0500	01371050-0500
1050	550	0.90	187	673	22.2	01361050-0550	01371050-0550
1050	600	0.90	187	716	24.0	01361050-0600	01371050-0600
1050	630	0.90	187	742	25.1	01361050-0630	01371050-0630
1050	650	0.90	187	759	25.8	01361050-0650	01371050-0650
1050	700	0.90	187	802	27.7	01361050-0700	01371050-0700

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
1050	750	0.90	187	845	29.6	01361050-0750	01371050-0750
1050	800	0.90	187	888	31.7	01361050-0800	01371050-0800
1050	850	0.90	187	931	33.8	01361050-0850	01371050-0850
1050	900	0.90	187	974	35.9	01361050-0900	01371050-0900
1050	950	0.90	187	1017	38.2	01361050-0950	01371050-0950
1050	1000	0.90	187	1060	40.5	01361050-1000	01371050-1000
1050	1050	0.90	187	1103	42.9	01361050-1050	01371050-1050
1100	80	0.90	193	269	10.0	01361100-0080	01371100-0080
1100	100	0.90	193	286	10.4	01361100-0100	01371100-0100
1100	120	0.90	193	303	10.9	01361100-0120	01371100-0120
1100	125	0.90	193	308	11.0	01361100-0125	01371100-0125
1100	140	0.90	193	320	11.3	01361100-0140	01371100-0140
1100	150	0.90	193	329	11.5	01361100-0150	01371100-0150
1100	160	0.90	193	338	11.8	01361100-0160	01371100-0160
1100	180	0.90	193	355	12.3	01361100-0180	01371100-0180
1100	200	0.90	193	372	12.7	01361100-0200	01371100-0200
1100	225	0.90	193	394	13.4	01361100-0225	01371100-0225
1100	250	0.90	193	415	14.0	01361100-0250	01371100-0250
1100	275	0.90	193	437	14.7	01361100-0275	01371100-0275
1100	300	0.90	193	458	15.4	01361100-0300	01371100-0300
1100	315	0.90	193	471	15.8	01361100-0315	01371100-0315
1100	350	0.90	193	501	16.8	01361100-0350	01371100-0350
1100	400	0.90	193	544	18.3	01361100-0400	01371100-0400
1100	450	0.90	193	587	19.8	01361100-0450	01371100-0450
1100	500	0.90	193	630	21.5	01361100-0500	01371100-0500
1100	550	0.90	193	673	23.2	01361100-0550	01371100-0550
1100	600	0.90	193	716	24.9	01361100-0600	01371100-0600
1100	630	0.90	193	742	26.0	01361100-0630	01371100-0630
1100	650	0.90	193	759	26.8	01361100-0650	01371100-0650
1100	700	0.90	193	802	28.7	01361100-0700	01371100-0700
1100	750	0.90	193	845	30.7	01361100-0750	01371100-0750
1100	800	0.90	193	888	32.8	01361100-0800	01371100-0800
1100	850	0.90	193	931	34.9	01361100-0850	01371100-0850
1100	900	0.90	193	974	37.1	01361100-0900	01371100-0900
1100	950	0.90	193	1017	39.4	01361100-0950	01371100-0950
1100	1000	0.90	193	1060	41.7	01361100-1000	01371100-1000
1100	1050	0.90	193	1103	44.2	01361100-1050	01371100-1050
1100	1100	0.90	193	1146	46.6	01361100-1100	01371100-1100
1150	80	0.90	200	269	10.6	01361150-0080	01371150-0080
1150	100	0.90	200	286	11.0	01361150-0100	01371150-0100
1150	120	0.90	200	303	11.5	01361150-0120	01371150-0120
1150	125	0.90	200	308	11.6	01361150-0125	01371150-0125
1150	140	0.90	200	320	12.0	01361150-0140	01371150-0140
1150	150	0.90	200	329	12.2	01361150-0150	01371150-0150
1150	160	0.90	200	338	12.4	01361150-0160	01371150-0160
1150	180	0.90	200	355	12.9	01361150-0180	01371150-0180
1150	200	0.90	200	372	13.4	01361150-0200	01371150-0200
1150	225	0.90	200	394	14.1	01361150-0225	01371150-0225
1150	250	0.90	200	415	14.7	01361150-0250	01371150-0250
1150	275	0.90	200	437	15.4	01361150-0275	01371150-0275
1150	300	0.90	200	458	16.1	01361150-0300	01371150-0300
1150	315	0.90	200	471	16.6	01361150-0315	01371150-0315
1150	350	0.90	200	501	17.6	01361150-0350	01371150-0350
1150	400	0.90	200	544	19.1	01361150-0400	01371150-0400
1150	450	0.90	200	587	20.7	01361150-0450	01371150-0450
1150	500	0.90	200	630	22.4	01361150-0500	01371150-0500
1150	550	0.90	200	673	24.1	01361150-0550	01371150-0550
1150	600	0.90	200	716	25.9	01361150-0600	01371150-0600
1150	630	0.90	200	742	27.0	01361150-0630	01371150-0630
1150	650	0.90	200	759	27.8	01361150-0650	01371150-0650
1150	700	0.90	200	802	29.8	01361150-0700	01371150-0700
1150	750	0.90	200	845	31.8	01361150-0750	01371150-0750

TR - Trouser pieces

Light gauge Galvanized piping system – Branches

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
1150	800	0.90	200	888	33.9	01361150-0800	01371150-0800
1150	850	0.90	200	931	36.1	01361150-0850	01371150-0850
1150	900	0.90	200	974	38.3	01361150-0900	01371150-0900
1150	950	0.90	200	1017	40.6	01361150-0950	01371150-0950
1150	1000	0.90	200	1060	43.0	01361150-1000	01371150-1000
1150	1050	0.90	200	1103	45.4	01361150-1050	01371150-1050
1150	1100	0.90	200	1146	48.0	01361150-1100	01371150-1100
1150	1150	0.90	200	1189	50.6	01361150-1150	01371150-1150
1200	80	0.90	206	269	11.2	01361200-0080	01371200-0080
1200	100	0.90	206	286	11.7	01361200-0100	01371200-0100
1200	120	0.90	206	303	12.1	01361200-0120	01371200-0120
1200	125	0.90	206	308	12.3	01361200-0125	01371200-0125
1200	140	0.90	206	320	12.6	01361200-0140	01371200-0140
1200	150	0.90	206	329	12.9	01361200-0150	01371200-0150
1200	160	0.90	206	338	13.1	01361200-0160	01371200-0160
1200	180	0.90	206	355	13.6	01361200-0180	01371200-0180
1200	200	0.90	206	372	14.1	01361200-0200	01371200-0200
1200	225	0.90	206	394	14.8	01361200-0225	01371200-0225
1200	250	0.90	206	415	15.5	01361200-0250	01371200-0250
1200	275	0.90	206	437	16.2	01361200-0275	01371200-0275
1200	300	0.90	206	458	16.9	01361200-0300	01371200-0300
1200	315	0.90	206	471	17.3	01361200-0315	01371200-0315
1200	350	0.90	206	501	18.4	01361200-0350	01371200-0350
1200	400	0.90	206	544	20.0	01361200-0400	01371200-0400
1200	450	0.90	206	587	21.6	01361200-0450	01371200-0450
1200	500	0.90	206	630	23.3	01361200-0500	01371200-0500
1200	550	0.90	206	673	25.1	01361200-0550	01371200-0550
1200	600	0.90	206	716	26.9	01361200-0600	01371200-0600
1200	630	0.90	206	742	28.1	01361200-0630	01371200-0630
1200	650	0.90	206	759	28.8	01361200-0650	01371200-0650
1200	700	0.90	206	802	30.8	01361200-0700	01371200-0700
1200	750	0.90	206	845	32.9	01361200-0750	01371200-0750
1200	800	0.90	206	888	35.0	01361200-0800	01371200-0800
1200	850	0.90	206	931	37.2	01361200-0850	01371200-0850
1200	900	0.90	206	974	39.5	01361200-0900	01371200-0900
1200	950	0.90	206	1017	41.9	01361200-0950	01371200-0950
1200	1000	0.90	206	1060	44.3	01361200-1000	01371200-1000
1200	1050	0.90	206	1103	46.8	01361200-1050	01371200-1050

D (mm)	B (mm)	t (mm)	L1 (mm)	L2 (mm)	Weight (kg)	Part no.	
						60 Degrees	90 Degrees
1200	1100	0.90	206	1146	49.3	01361200-1100	01371200-1100
1200	1150	0.90	206	1189	52.0	01361200-1150	01371200-1150
1200	1200	0.90	206	1232	54.7	01361200-1200	01371200-1200
1250	80	0.90	213	269	11.8	01361250-0080	01371250-0080
1250	100	0.90	213	286	12.3	01361250-0100	01371250-0100
1250	120	0.90	213	303	12.8	01361250-0120	01371250-0120
1250	125	0.90	213	308	12.9	01361250-0125	01371250-0125
1250	140	0.90	213	320	13.3	01361250-0140	01371250-0140
1250	150	0.90	213	329	13.5	01361250-0150	01371250-0150
1250	160	0.90	213	338	13.8	01361250-0160	01371250-0160
1250	180	0.90	213	355	14.3	01361250-0180	01371250-0180
1250	200	0.90	213	372	14.9	01361250-0200	01371250-0200
1250	225	0.90	213	394	15.5	01361250-0225	01371250-0225
1250	250	0.90	213	415	16.2	01361250-0250	01371250-0250
1250	275	0.90	213	437	17.0	01361250-0275	01371250-0275
1250	300	0.90	213	458	17.7	01361250-0300	01371250-0300
1250	315	0.90	213	471	18.1	01361250-0315	01371250-0315
1250	350	0.90	213	501	19.2	01361250-0350	01371250-0350
1250	400	0.90	213	544	20.8	01361250-0400	01371250-0400
1250	450	0.90	213	587	22.5	01361250-0450	01371250-0450
1250	500	0.90	213	630	24.2	01361250-0500	01371250-0500
1250	550	0.90	213	673	26.0	01361250-0550	01371250-0550
1250	600	0.90	213	716	27.9	01361250-0600	01371250-0600
1250	630	0.90	213	742	29.1	01361250-0630	01371250-0630
1250	650	0.90	213	759	29.9	01361250-0650	01371250-0650
1250	700	0.90	213	802	31.9	01361250-0700	01371250-0700
1250	750	0.90	213	845	34.0	01361250-0750	01371250-0750
1250	800	0.90	213	888	36.2	01361250-0800	01371250-0800
1250	850	0.90	213	931	38.4	01361250-0850	01371250-0850
1250	900	0.90	213	974	40.7	01361250-0900	01371250-0900
1250	950	0.90	213	1017	43.1	01361250-0950	01371250-0950
1250	1000	0.90	213	1060	45.6	01361250-1000	01371250-1000
1250	1050	0.90	213	1103	48.1	01361250-1050	01371250-1050
1250	1100	0.90	213	1146	50.7	01361250-1100	01371250-1100
1250	1150	0.90	213	1189	53.4	01361250-1150	01371250-1150
1250	1200	0.90	213	1232	56.1	01361250-1200	01371250-1200
1250	1250	0.90	213	1275	58.9	01361250-1250	01371250-1250